

# Aspri 15 Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala.

## Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Silentioasa.  
Autoamorsanta la 9m.

## Motor

Asincron 2 poli.  
Protectie IPX5.  
Clasa de izolatie F.  
Varianta monofazata cu protectie termica incorporata.  
Serviciu continuu.

## Materiale

Corpul pompei si turbinele din inox AISI 304.  
Axul motorului din inox AISI 431.  
Difuzoare din tehnopolimer.  
Aspiratia si refularea din fonta  
Garnitura mecanica.  
Carcasa motorului din aluminiu.  
O-ringuri din NBR/EPDM.

## Limite de functionare

Temperatura maxima a apei 40 °C.

## Dotari


Fara cablu inclus.



## Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	l/min m³/h	10	20	30	35	40	50	60	65	Cod	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			0,6	1,2	1,8	2,1	2,4	3,0	3,6	3,9	1~230V	3~230V/400V
Aspri 15 3	2,7	2,1	1,2	0,61	0,61	0,37	0,5	12	32	30	26	24	22	17	11	7	96415	96412	
Aspri 15 4	3,5	2,3	1,3	0,79	0,79	0,55	0,75	12	43	39	35	32	27	22	14	9	96423	96421	
Aspri 15 5	4,1	3,3	1,9	0,95	0,95	0,75	1	12	51	47	42	38	34	25	17	12	96432	96430	

## Curbe de functionare la 2900 rpm

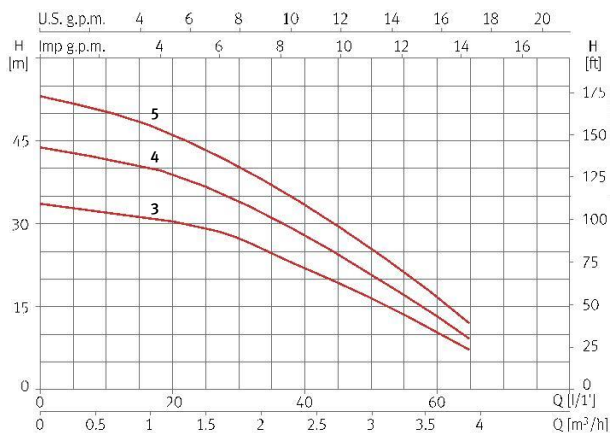

## Dimensiuni si greutate

Model	A	B	C	D	E	F	G	H	I	J	Kg
Aspri 15 3	187	237	202	110	74	162	121	102	1"	1"	9,2
Aspri 15 4	211	261	202	110	74	162	121	102	1"	1"	10
Aspri 15 5	235	285	202	110	74	162	121	102	1"	1"	11

