

Aspri 25 Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala.

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Silentioasa.
Autoamorsanta la 9m.

Motor

Asincron 2 poli.
Protectie IPX5.
Clasa de izolatie F.
Varianta monofazata cu protectie termica incorporata.
Serviciu continuu.

Materiale

Corpul pompei si turbinele din inox AISI 304.
Axul motorului din inox AISI 431.
Difuzoare din tehnopolimer.
Aspiratia si refularea din fonta
Garnitura mecanica.
Carcasa motorului din aliminiu.
O-ringuri din NBR/EPDM.

Limite de functionare

Temperatura maxima a apei 40 °C.

Dotari


Fara cablu inclus.



Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	l/min	15	30	45	60	75	90	105	120	Cod	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			m³/h	0,9	1,8	2,7	3,6	4,5	5,4	6,3	7,2	1~230V
Aspri 25 3	5,5	3,5	2	1,2	1	0,75	1	16	mwc	33	32	31	28	26	22	17	12	96450	96447
Aspri 25 4	6,8	4,3	2,5	1,5	1,4	0,9	1,2	16		43	42	40	37	33	28	22	15	96458	96455
Aspri 25 5	7,4	5,2	3	1,7	1,7	1,1	1,5	25		56	55	53	48	43	37	29	20	96466	96464

Curba de functionare la 2900 rpm

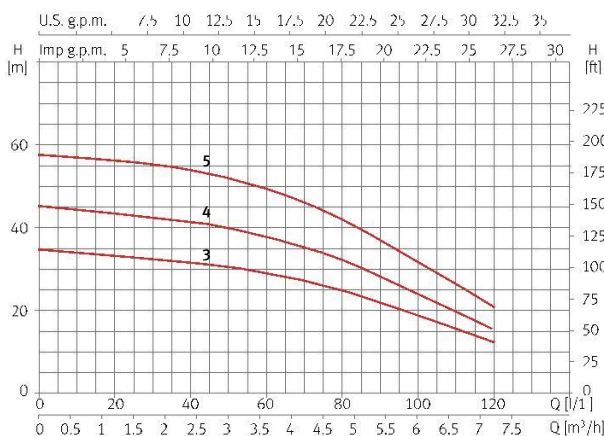

Dimensiuni si greutate

Model	A	B	C	D	E	F	G	H	I	J	L/M	Kg
Aspri 25 3	202	127	253	82	75	110	218	59	138	8	1"	13,5
Aspri 25 4	229	127	279	82	75	110	218	59	138	8	1"	14,6
Aspri 25 5	255	127	328	82	90	122	241	59	138	8	1"	17,2

