

Aspri 35N Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala.

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Silentioasa.
Autoamorsanta la 9m.

Motor

Asincron 2 poli.
Protectie IPX5.
Clasa de izolatie F.
Varianta monofazata cu protectie termica incorporata.
Serviciu continuu.

Materiale

Corpul pompei si turbinele din inox AISI 304.
Axul motorului din inox AISI 431.
Difuzoare din tehnopolimer.
Aspiratia si refularea din fonta
Garnitura mecanica.
Carcasa motorului din aluminiu.
O-ringuri din NBR/EPDM.

Limite de functionare

Temperatura maxima a apei 40 °C.

Dotari


Fara cablu inclus.



Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	l/min m³/h	Flow rate (m³/h)								Cod	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			20	40	60	80	100	120	140	150	1~230V	3~230V/400V
Aspri 35 3N	6,7	4,5	2,6	1,5	1,4	0,75	1	25	mwc	41	39	36	34	31	27	22	18	129699	129696
Aspri 35 4N	8,4	5,3	3,1	1,8	1,8	1,1	1,5	25		54	51	48	44	39	33	27	23	129700	129697
Aspri 35 5N	10,2	6,9	4	2,3	2,2	1,5	2	30		68	64	60	55	49	41	34	30	129701	129698
Aspri 35 6N	-	8,3	4,8	-	2,7	2,2	3	-		81	78	74	67	60	52	42	37	-	130368

Curba de functionare la 2900 rpm

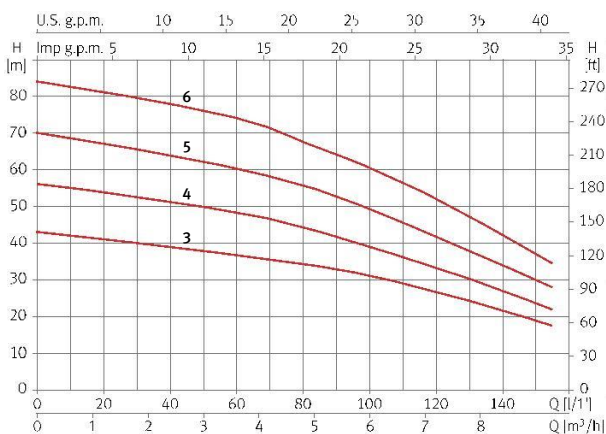

Dimensiuni si greutate

Model	A	B	C/E	D	F	G	H	I	J	K	Kg
Aspri 35 3N	221	187	1 1/4"	147	282	158	122	90	60	12	18,5
Aspri 35 4N	247	212	1 1/4"	147	282	158	122	90	60	12	20,5
Aspri 35 5N	271	236	1 1/4"	147	282	158	122	90	60	12	23,5
Aspri 35 6N	296	261	1 1/4"	147	282	158	122	90	60	12	23,7

