

# Aspri 45N Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala.

## Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Silentioasa.  
Autoamorsanta la 9m.

## Motor

Asincron 2 poli.  
Protectie IPX5.  
Clasa de izolatie F.  
Varianta monofazata cu protectie termica incorporata.  
Serviciu continuu.

## Materiale

Corpul pompei si turbinele din inox AISI 304.  
Axul motorului din inox AISI 431.  
Difuzoare din tehnopolimer.  
Aspiratia si refularea din fonta  
Garnitura mecanica.  
Carcasa motorului din aluminiu.  
O-ringuri din NBR/EPDM.

## Limite de functionare

Temperatura maxima a apei 40 °C.

## Dotari


Fara cablu inclus.



## Caracteristici tehnice

| Model       | I [A]      |            |            | P1 [kW] |     | P2   |      | c [µF] | l/min<br>m³/h |    |    |    |     |     |     |     |     | Code   |             |
|-------------|------------|------------|------------|---------|-----|------|------|--------|---------------|----|----|----|-----|-----|-----|-----|-----|--------|-------------|
|             | 1~<br>230V | 3~<br>230V | 3~<br>400V | 1~      | 3~  | [kW] | [HP] |        |               | 25 | 50 | 75 | 100 | 125 | 150 | 200 | 250 | 1~230V | 3~230V/400V |
| Aspri 45 3N | 7,9        | 5,2        | 3          | 1,8     | 1,7 | 1,1  | 1,5  | 25     | mwc           | 37 | 36 | 35 | 33  | 30  | 27  | 18  | 8   | 132087 | 132089      |
| Aspri 45 4N | 10         | 6,9        | 4          | 2,2     | 2,2 | 1,5  | 2    | 30     |               | 48 | 47 | 45 | 42  | 39  | 36  | 24  | 11  | 132088 | 132090      |
| Aspri 45 5N | -          | 8,6        | 5          | -       | 2,8 | 2,2  | 3    | -      |               | 61 | 59 | 56 | 54  | 50  | 45  | 31  | 15  | -      | 132091      |

## Curbe de functionare la 2900 rpm

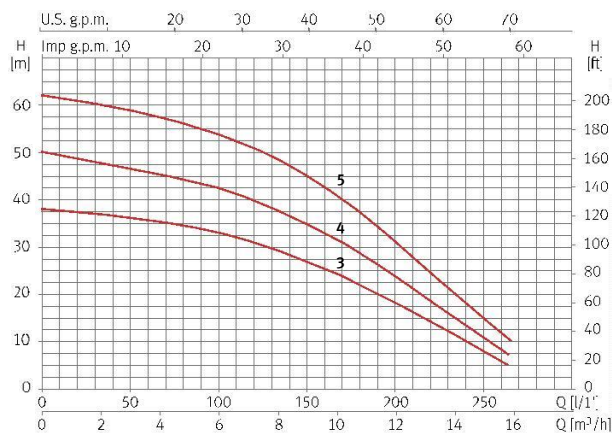

## Dimensiuni si greutate

| Model       | A   | B   | C      | D   | E      | F   | G   | H   | I  | J  | K  | Kg   |
|-------------|-----|-----|--------|-----|--------|-----|-----|-----|----|----|----|------|
| Aspri 45 3N | 246 | 212 | 1 1/2" | 147 | 1 1/4" | 282 | 158 | 128 | 90 | 60 | 12 | 22,6 |
| Aspri 45 4N | 277 | 242 | 1 1/2" | 147 | 1 1/4" | 282 | 158 | 128 | 90 | 60 | 12 | 23,7 |
| Aspri 45 5N | 307 | 273 | 1 1/2" | 147 | 1 1/4" | 282 | 158 | 128 | 90 | 60 | 12 | 25,3 |

