

Centrifugal multistage pump for water supply

Applications

Pumping of clean water for domestic, industrial, agricultural and gardening purposes.
Silent.

Materials

Pump body and impellers in AISI 304.
Pump shaft in AISI 420.
Diffusers in technopolymer.
Suction and discharge in cast iron with cataphoresis coating.
Mechanical seal.
Motor casing in aluminum.
O-rings in NBR/EPDM.

Equipment

No cable.
Oval counter flanges DIN 2558 and gaskets included.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Single phase motor with built-in thermal protection.
Continuous operation.

Range of use

Maximum water temperature 40 °C.



Stainless steel impellers



Easy to maintain



Quiet



Pressure up to 70 m




Flow rate up to 85 l/min

Features table

Model	I [A]			P1 [kW]		P2		c [μF]	l/min									Code	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			8	17	25	33	42	58	75	85	1~230V	3~230V/400V
Multi 25 4	5,5	3,6	2,1	1,2	1,1	0,75	1	16	m³/h	0,5	1,0	1,5	2,0	2,5	3,5	4,5	5,1	134927	134930
Multi 25 5	6,4	4,2	2,5	1,4	1,3	0,9	1,2	16	mwc	53	51	48	46	42	33	22	13	134928	134931

Performance curve at 2900 rpm

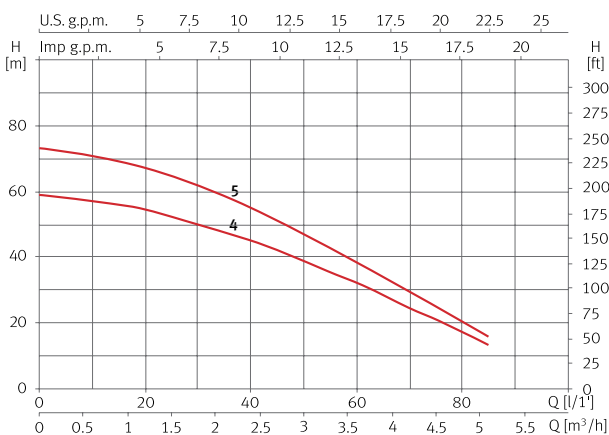

Dimension and weight

Model	A	B	C	D	E	F	G	H	I	J	K	Kg
Multi 25 4	420	205	170	42	203	191	1 1/4"	1 1/4"	125	125	240	16,5
Multi 25 5	442	226	170	42	203	191	1 1/4"	1 1/4"	125	125	240	17,6

