

# Multi 25 Suprafata | Verticale



Pompa de suprafata centrifuga, multietajata, verticala.

### Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Silentioasa.

### Motor

Asincron 2 poli.  
Protectie IPX5.  
Clasa de izolatie F.  
Varianta monofazata cu protectie termica incorporata.  
Serviciu continuu.

### Materiale

Corpul pompei si turbinele din inox AISI 304.  
Axul motorului din inox AISI 420.  
Difuzoare din tehnopolimer.  
Aspiratia si refularea din fonta  
Garnitura mecanica.  
Carcasa motorului din aluminiu.  
O-ringuri din NBR/EPDM.

### Limite de functionare

Temperatura maxima a apei 40 °C.




### Dotari

Fara cablu inclus.  
Flanse si garnituri incluse

## Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	l/ min	8	17	25	33	42	58	75	85	Cod	
	1~ 230V	3~ 230V	3~ 400V	1~	3~	[kW]	[HP]			m³/h	0,5	1,0	1,5	2,0	2,5	3,5	4,5	5,1	1~230V
Multi 25 4	5,8	3,9	2,3	1,2	1,1	0,75	1	16	m³/h	53	51	48	46	42	33	22	13	134927	134930
Multi 25 5	6,4	4,2	2,5	1,4	1,3	0,9	1,2	16		66	64	61	57	52	41	27	16	134928	134931

## Curbe de functionare la 2900 rpm

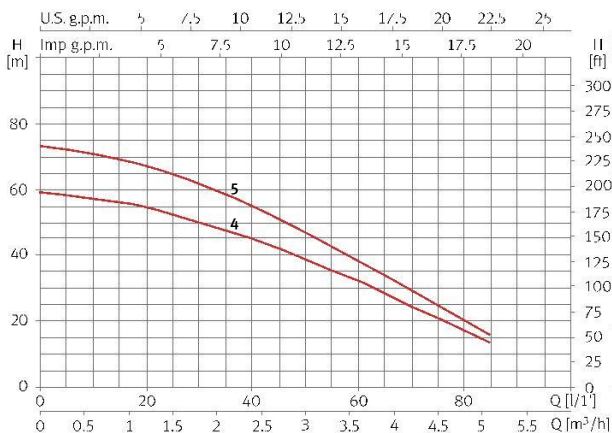

## Dimensiuni si greutate

Model	A	B	C	D	E	F	G	H	I	J	K	Kg
Multi 25 4	420	205	170	42	203	191	1 <sup>1/4</sup> "	1 <sup>1/4</sup> "	125	125	240	17,3
Multi 25 5	442	226	170	42	203	191	1 <sup>1/4</sup> "	1 <sup>1/4</sup> "	125	125	240	18,1

