

# Prisma 35N Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala

### Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol  
Silentioasa.  
Autoamorsanta la 2m.

### Motor

Asincron 2 poli.  
Protectie IPX5.  
Clasa de izolatie F.  
Varianta monofazata cu protectie termica incorporata.  
Serviciu continuu.

### Materiale

Corpul pompei si turbinele din inox AISI 304.  
Axul motorului din inox AISI 431.  
Difuzoare din tehnopolimer.  
Aspiratia si refularea din fonta  
Garnitura mecanica.  
Carcasa motorului din aluminiu  
O-ringuri din NBR/EPDM.

### Limite de functionare

Temperatura maxima a apei 40 °C.

### Dotari


Fara cablu inclus.



## Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	l/ min m³/h	20	40	60	80	100	120	140	150	Cod	
	1~ 230V	3~ 230V	3~ 400V	1~	3~	[kW]	[HP]			20	40	60	80	100	120	140	150	1~230V	3~230V/400V
Prisma 35 3N	6,7	4,5	2,6	1,5	1,4	0,75	1	25	mwc	41	39	36	34	31	27	22	18	129343	129346
Prisma 35 4N	8,4	5,3	3,1	1,8	1,8	1,1	1,5	25		54	51	48	44	39	33	27	23	129344	129347
Prisma 35 5N	10,2	6,9	4	2,3	2,2	1,5	2	30		68	64	60	55	49	41	34	30	129345	129348
Prisma 35 6N	-	8,3	4,8	-	2,7	2,2	3	-		81	78	74	67	60	52	42	37	-	129349

## Curbe de functionare la 2900 rpm

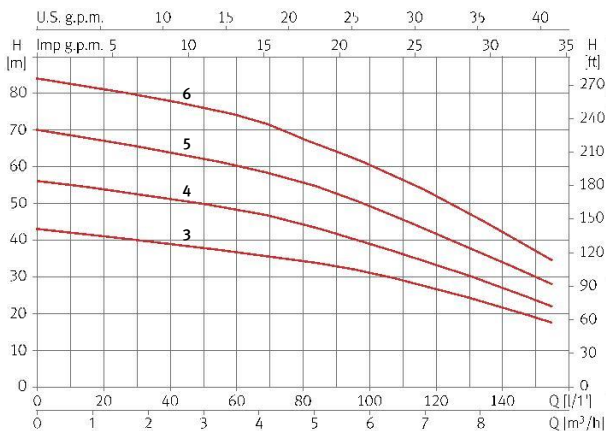

## Dimensiuni si greutate

Model	A	B	C/E	D	F	G	H	I	J	K	Kg
Prisma 35 3N	221	187	1 1/4"	147	282	158	122	90	60	12	18,5
Prisma 35 4N	247	212	1 1/4"	147	282	158	122	90	60	12	20,5
Prisma 35 5N	271	236	1 1/4"	147	282	158	122	90	60	12	23,5
Prisma 35 6N	296	261	1 1/4"	147	282	158	122	90	60	12	23,7

