

Prisma 45N Suprafata | Orizontale



Pompa de suprafata centrifuga, multietajata, orizontala.

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Silentioasa.
Autoamorsanta la 2m.

Motor

Asincron 2 poli.
Protectie IPX5.
Clasa de izolatie F.
Varianta monofazata cu protectie termica incorporata.
Serviciu continuu.

Materiale

Corpul pompei si turbinele din inox AISI 304.
Axul motorului din inox AISI 431.
Difuzoare din tehnopolimer.
Aspiratia si refularea din fonta.
Garnitura mecanica.
Carcasa motorului din aluminiu
O-ringuri din NBR/EPDM.

Limite de functionare

Temperatura maxima a apei 40 °C.

Dotari


Fara cablu inclus.



Caracteristici tehnice

Model	I [A]			P1 [kW]		P2		c [μF]	v _{min} m ³ /h									Cod	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			25	50	75	100	125	150	200	250	1~230V	3~230V/400V
Prisma 45 3N	7,9	5,2	3	1,8	1,7	1,1	1,5	25	TWC	1,5	3,0	4,5	6,0	7,5	9,0	12	15	132082	132084
Prisma 45 4N	10	6,9	4	2,2	2,2	1,5	2	30		37	36	35	33	30	27	18	8	132083	132085
Prisma 45 5N	-	8,6	5	-	2,8	2,2	3	-		48	47	45	42	39	36	24	11	-	132086
										61	59	56	54	50	45	31	15		

Curbe de functionare la 2900 rpm

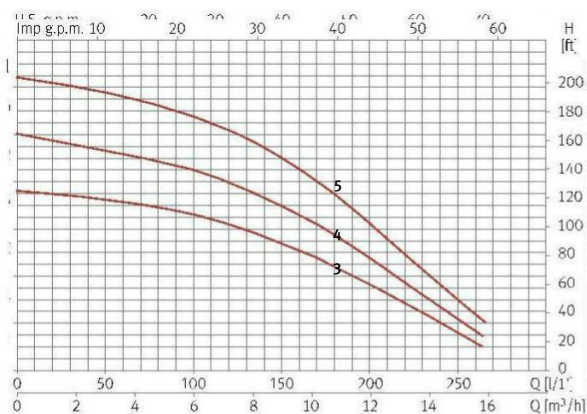

Dimensiuni si greutate

Model	A	B	C	D	E	F	G	H	I	J	K	Kg
Prisma 45 3N	246	212	1 1/2"	147	1 1/4"	282	158	128	90	60	12	22,6
Prisma 45 4N	277	242	1 1/2"	147	1 1/4"	282	158	128	90	60	12	23,7
Prisma 45 5N	307	273	1 1/2"	147	1 1/4"	282	158	128	90	60	12	25,3

