

# Prisma 25 | Suprafata



Pompa de suprafata centrifuga, multietajata, orizontala.

### Aplicati

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Silentbasa.  
Autoamorsanta la 2m.

### Motor

Asincron 2 poli.  
Grad de protectie IPX5.  
Clasa de izolatie F.  
Varianta monofazata cu protectie termica incorporata.  
Serviciu continuu.

### Materiale

Corpul pompei si turbinele din inox AISI 304.  
Axul motorului din inox AISI 431.  
Difuzoare din tehnopolimer.  
Aspiratia si refularea in fonta.  
Garnitura mecanica din grafit.  
Carcasa motorului din aluminiu.  
O-ringuri din NBR/EPDM.

### Limite de functionare

Temperatura maxima a apei 40° C.

### Dotari


Fara cablu inclus.



### Caracteristici tehnice.

Model	I [A]			P1 [kW]		P2		c [μF]	l/min m³/h	15	30	45	60	75	90	105	120	Cod	
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]											1~230V	3~230V/400V
	Prisma 25 2	4,3	-	-	0,9	-	0,55											0,75	16
Prisma 25 3	5,5	3,5	2	1,2	1	0,75	1	16	33	32	31	28	26	22	17	12	97178	97175	
Prisma 25 4	6,8	4,3	2,5	1,5	1,4	0,9	1,2	16	43	42	40	37	33	28	22	15	97188	97185	
Prisma 25 5	7,4	5,2	3	1,7	1,7	1,1	1,5	25	56	55	53	48	43	37	29	20	97196	97194	
Prisma 25 6	9,8	6,7	3,9	2,2	2	1,5	2	30	72	68	65	58	50	40	32	24	97203	97202	

### Curbe de functionare la 2900 rpm.

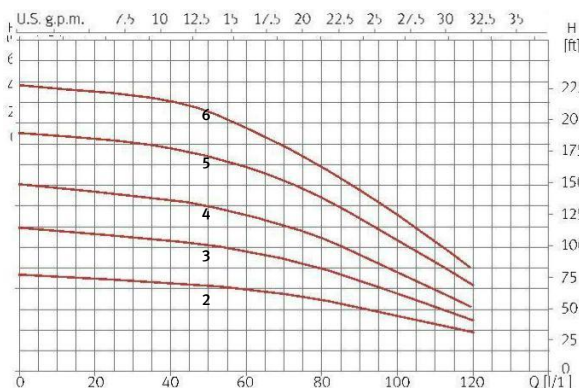

### Dimensiuni si greutate.

Model	A	B	C	D	E	F	G	H	I	J	L/M	Kg
Prisma 25 2	176	127	226	82	75	110	218	59	138	8	1"	12,5
Prisma 25 3	202	127	253	82	75	110	218	59	138	8	1"	13,5
Prisma 25 4	229	127	279	82	75	110	218	59	138	8	1"	14,6
Prisma 25 5	255	127	328	82	90	122	241	59	138	8	1"	17,2
Prisma 25 6	281	142	304	-	90	122	286	69	154	10	1"	20

