

# Aspri 15 Supply | Horizontal surface



## Centrifugal multistage pump for water supply, self-priming up to 9m

### Applications

Pumping of clean water for domestic, industrial, agricultural and gardening purposes.  
Silent.  
Self-priming up to 9m.

### Materials

Pump body and impellers in AISI 304.  
Pump shaft in AISI 431.  
Diffusers in technopolymer.  
Suction and discharge in cast iron with cataphoresis coating (Model B in brass).  
Mechanical seal.  
Motor casing in aluminum.  
O-rings in NBR/EPDM.

### Equipment

No cable (model B with 2m of cable with plug type F).

### Motor

Asynchronous 2 poles.  
IPX5 protection.  
Class F insulation.  
Single phase motor with built-in thermal protection.  
Continuous operation.

### Range of use

Maximum water temperature 40 °C.




Stainless steel impellers	Self-priming up to 9 m	High performance	Easy to maintain	Quiet	Pressure up to 50 m	Flow rate up to 65 l/min

### Features table

Model	I [A]			P1 [kW]		P2		c [μF]	l/min	Code									
	1~230V	3~230V	3~400V	1~	3~	[kW]	[HP]			m³/h	0,6	1,2	1,8	2,4	3,0	3,6	1~230V	1~230V (Model B)	3~230V/400V
Aspri 15 3	2,8	2,1	1,2	0,61	0,61	0,37	0,5	12		32	30	26	22	17	11	96415	96419	96412	96413
Aspri 15 4	3,6	2,3	1,3	0,79	0,79	0,55	0,75	12	mwc	43	39	35	27	22	14	96423	96427	96421	96422
Aspri 15 5	4,1	3,3	1,9	0,95	0,95	0,75	1	12		51	47	42	34	25	17	96432	96436	96430	96431

### Performance curve at 2900 rpm

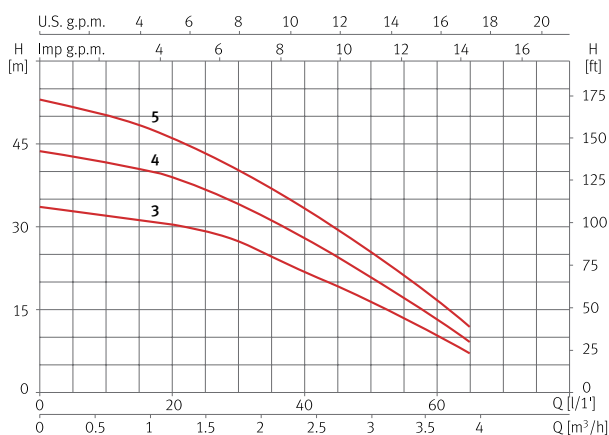

### Dimension and weight

Model	A	B	C	D	E	F	G	H	I	J	Kg
Aspri 15 3	187	237	202	110	74	162	121	102	1"	1"	9,2
Aspri 15 4	211	261	202	110	74	162	121	102	1"	1"	10
Aspri 15 5	235	285	202	110	74	162	121	102	1"	1"	11

