

## Submersibile 4"

### Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Functionare in foraje de 4".

### Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.  
Difuzoarele si turbinele flotante din tehnopolimer.  
O-ringuri din NBR/EPDM.

### Dotari

Supapa de sens incorporata.  
Cuplaj cu motor conform NEMA MG1-18.388.


### Limite de functionare

Temperatura maxima a apei 40 °C.  
Cantitatea maxima de nisip in suspensie 100g/m<sup>3</sup>.  
Adancimea maxima de imersie 150m.



### Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m <sup>3</sup> /h	0	20	25	30	40	50	Code
	[kW]	[HP]		0	1,2	1,5	1,8	2,4	3,0	
ES4 02 10	0,55	0,75	mwc	69	63	60	55	44	29	157703
ES4 02 14	0,75	1		92	83	79	74	60	42	157704
ES4 02 20	1,1	1,5		139	127	120	111	90	60	157705
ES4 02 28	1,5	2		193	176	167	155	125	83	162589

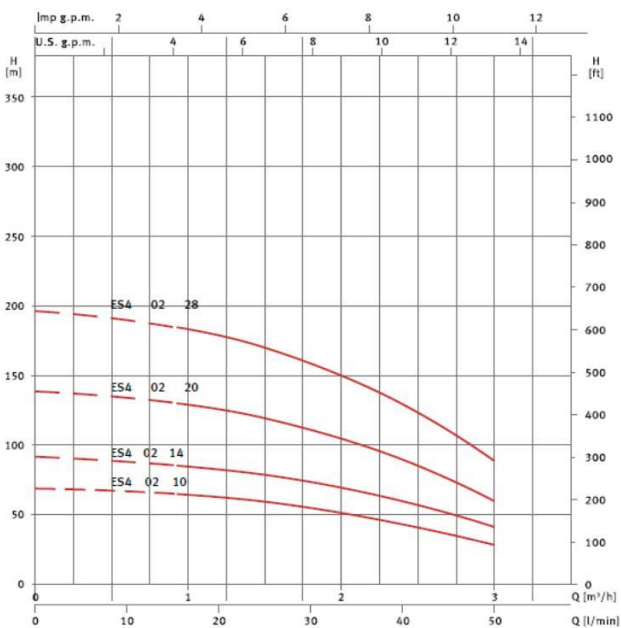

Model	A	B	C	Kg
ES4 02 10	324	98	1 1/4"	3,3
ES4 02 14	394	98	1 1/4"	3,9
ES4 02 20	499	98	1 1/4"	4,9
ES4 02 28	640	1090	1 1/4"	6,2

