

ES4 03 | Submersibile



Submersibile 4"

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Functionare in foraje de 4".

Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.
Difuzoarele si turbinele flotante din tehnopolimer.
O-ringuri din NBR/EPDM.

Dotari

Supapa de sens incorporata.
Cuplaj cu motor conform NEMA MG1-18.388.


Limite de functionare

Temperatura maxima a apei 40 °C.
Cantitatea maxima de nisip in suspensie 100g/m³.
Adancimea maxima de imersie 150m.



Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m ³ /h	0	20	30	40	50	70	Code
	[kW]	[HP]		0	1,2	1,8	2,4	3,0	4,2	
ES4 03 11	0,75	1	mwc	72	68	64	58	49	26	157708
ES4 03 16	1,1	1,5		106	101	95	83	70	33	157709
ES4 03 21	1,5	2		142	135	127	115	100	49	157710
ES4 03 32	2,2	3		208	200	187	165	138	62	157711

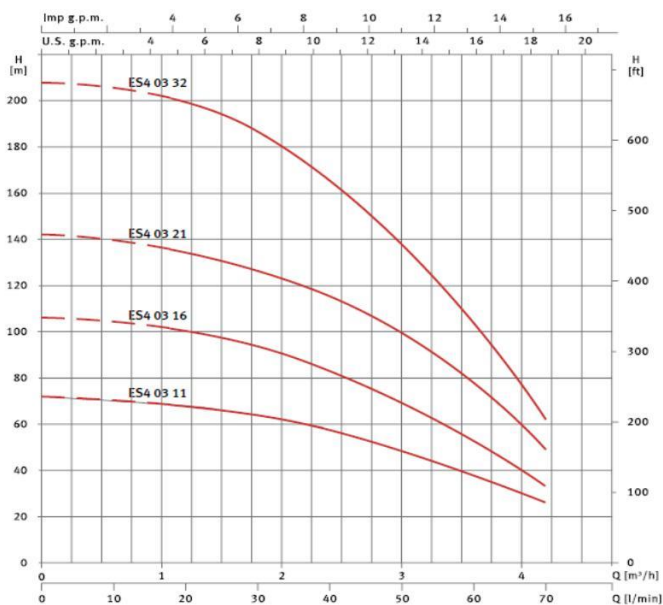

Model	A	B	C	Kg
ES4 03 11	342	98	1 1/4"	3,4
ES4 03 16	430	98	1 1/4"	4,2
ES4 03 21	519	98	1 1/4"	5,0
ES4 03 32	749	98	1 1/4"	7,1

