

Submersibile 4"

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Functionare in foraje de 4".

Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.
Difuzoarele si turbinele flotante din tehnopolimer.
O-ringuri din NBR/EPDM.

Dotari

Supapa de sens incorporata.
Cuplaj cu motor conform NEMA MG1-18.388.


Limite de functionare

Temperatura maxima a apei 40 °C.
Cantitatea maxima de nisip in suspensie 100g/m³.
Adancimea maxima de imersie 150m.



Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m ³ /h	0	40	50	70	90	100	Code
	[kW]	[HP]		0	2,4	3,0	4,2	5,4	6,0	
ES4 04 08	0,75	1	mwc	51	46	43	35	24	18	157714
ES4 04 12	1,1	1,5		77	71	68	57	41	31	157715
ES4 04 16	1,5	2		102	96	92	77	57	46	157716
ES4 04 24	2,2	3		151	139	132	111	80	62	157717
ES4 04 32	3	4		203	185	175	146	105	80	157718
ES4 04 44	4	5,5		278	260	247	210	159	127	157720

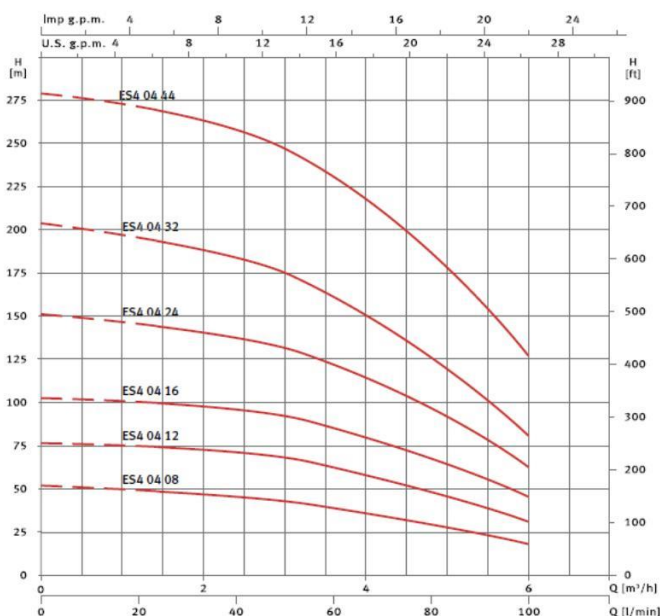

Model	A	B	C	Kg
ES4 04 08	345	98	1 1/4"	3,3
ES4 04 12	433	98	1 1/4"	4,1
ES4 04 16	542	98	1 1/4"	5,0
ES4 04 24	777	98	1 1/4"	6,6
ES4 04 32	965	98	1 1/4"	8,7
ES4 04 44	1296	98	1 1/4"	11,2

