

# ES4 06 | Submersibile



## Submersibile 4"

### Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.  
Functionare in foraje de 4".

### Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.  
Difuzoarele si turbinele flotante din tehnopolimer.  
O-ringuri din NBR/EPDM.

### Dotari

Supapa de sens incorporata.  
Cuplaj cu motor conform NEMA MG1-18.388.


### Limite de functionare

Temperatura maxima a apei 40 °C.  
Cantitatea maxima de nisip in suspensie 100g/m<sup>3</sup>.  
Adancimea maxima de imersie 150m.



### Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m <sup>3</sup> /h	0	50	70	90	120	140	Code
	[kW]	[HP]		0	3,0	4,2	5,4	7,2	8,4	
ES4 06 07	0,75	1	mwc	42	36	32	28	19	11	157721
ES4 06 10	1,1	1,5		62	53	48	41	29	18	157722
ES4 06 14	1,5	2		90	77	71	63	46	28	157723
ES4 06 20	2,2	3		125	107	97	86	62	40	157724
ES4 06 27	3	4		169	145	131	115	84	55	157725
ES4 06 36	4	5,5		221	190	173	154	112	72	157727

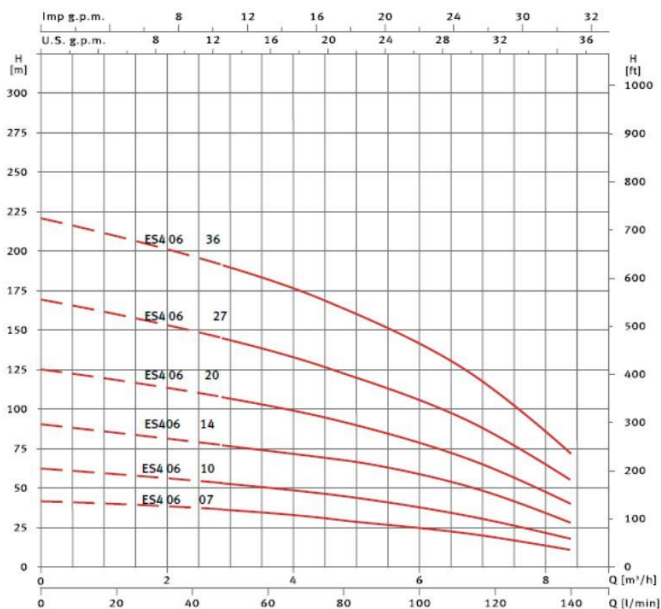

Model	A	B	C	Kg
ES4 06 07	390	98	2"	3,7
ES4 06 10	483	98	2"	4,6
ES4 06 14	607	98	2"	5,7
ES4 06 20	831	98	2"	7,5
ES4 06 27	1048	98	2"	9,6
ES4 06 36	1318	98	2"	12,2

