

Submersibile 4"

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Functionare in foraje de 4".

Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.
Difuzoarele si turbinele flotante din tehnopolimer.
O-ringuri din NBR/EPDM.

Dotari

Supapa de sens incorporata.
Cuplaj cu motor conform NEMA MG1-18.388.


Limite de functionare

Temperatura maxima a apei 40 °C.
Cantitatea maxima de nisip in suspensie 100g/m³.
Adancimea maxima de imersie 150m.



Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m ³ /h	0	80	100	140	180	200	Code
	[kW]	[HP]		0	4,8	6,0	8,4	10,8	12	
ES4 08 06	1,1	1,5	mwc	39	36	34	29	22	17	157730
ES4 08 08	1,5	2		52	48	46	39	29	24	157731
ES4 08 13	2,2	3		82	75	71	59	40	30	157732
ES4 08 17	3	4		108	98	94	79	58	46	157733
ES4 08 23	4	5,5		148	134	127	108	79	60	157735
ES4 08 32	5,5	7,5		202	182	172	143	105	80	157736

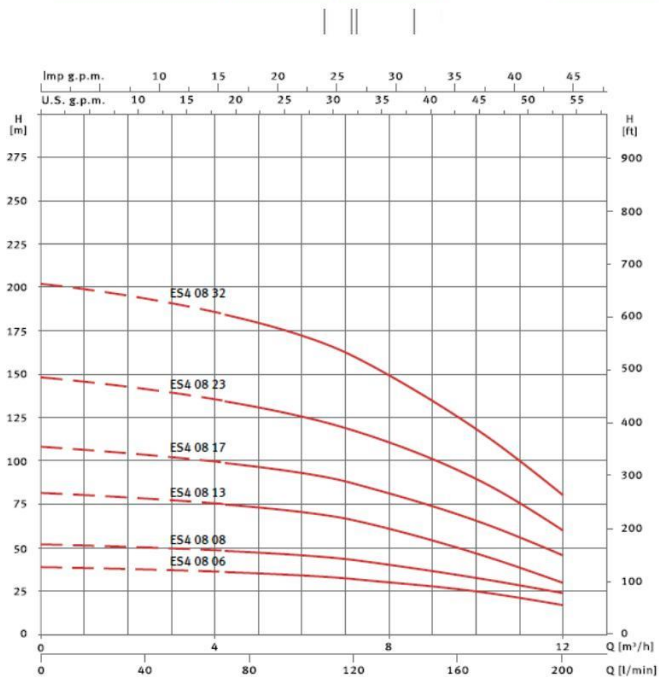

Model	A	B	C	Kg
ES4 08 06	356	98	2"	3,4
ES4 08 08	418	98	2"	4,0
ES4 08 13	573	98	2"	5,5
ES4 08 17	697	98	2"	6,6
ES4 08 23	921	98	2"	8,4
ES4 08 32	1238	98	2"	11,0

