

Submersibile 4"

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Functionare in foraje de 4"

Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.
Difuzoarele si turbinele flotante din tehnopolimer.
O-ringuri din NBR/EPDM.

Dotari

Supapa de sens incorporata.
Cuplaj cu motor conform NEMA MG1-18.388.


Limite de functionare

Temperatura maxima a apei 40 °C.
Cantitatea maxima de nisip in suspensie 100g/m³.
Adancimea maxima de imersie 150m.



Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m ³ /h	0	100	140	180	220	260	Code
	[kW]	[HP]		0	6,0	8,4	10,8	13,2	15,6	
ES4 12 07	1,5	2	mwc	45	37	33	28	22	14	157737
ES4 12 10	2,2	3		64	54	48	41	32	20	157738
ES4 12 14	3	4		89	76	67	56	43	28	157739
ES4 12 19	4	5,5		120	102	91	76	58	37	157741
ES4 12 26	5,5	7,5		163	136	120	100	75	48	157742

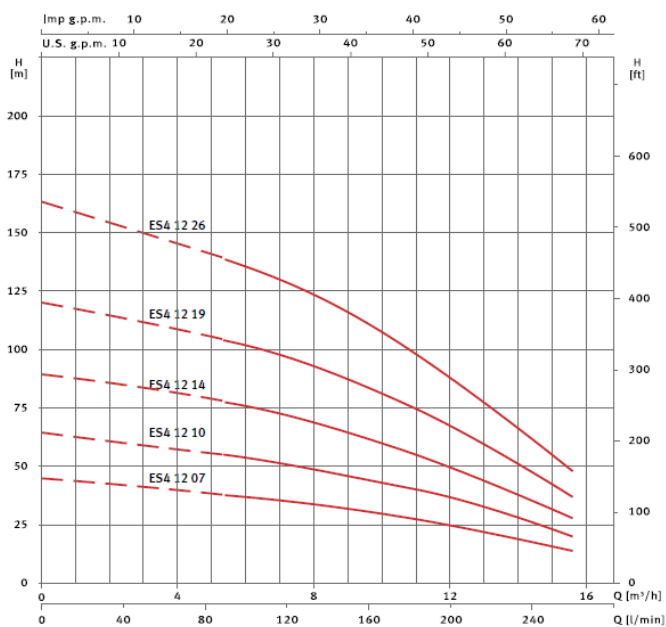

Model	A	B	C	Kg
ES4 12 07	534	98	2"	5,3
ES4 12 10	690	98	2"	6,7
ES4 12 14	989	98	2"	8,6
ES4 12 19	1195	98	2"	11,0
ES4 12 26	1559	98	2"	14,3

