

Electropompe centrifuge autoamorsante 9m.

Aplicatii

Pomparea apei curate.

Motor

Clasa de izolatie F.
Protectie IP 44.
Serviciu continuu.
Varianta monofazata cu protectie termica incorporata.

Materiale

Corpul pompei si corpul motorului din fonta.
Turbinele din bronz (noryl pentru modelele 100 si 150).
Garnitura mecanica din ceramica-grafit.
Axul motorului din inox AISI 304.




Caracteristici tehnice


Model	P2		I (A)		l/min m³/h	Q (l/min)																Cod.
	Hp	Kw	1~230 V	3~400 V		0	10	20	30	40	50	60	70	80	100	120	140	160				
NP 100M	1,0	0,75	4,8		mca	48	43	38	34	29	25	22	19							A00618		
NP 130M	1,3	0,97	5,2			53	48	42	38	34	30	26	20							A00619		
NP 150M	1,5	1,1	7			56	51	44	40	36	33	30	27	25						A00622		
NP 100	1,0	0,75		1,8		48	43	38	34	29	25	22	19							A00617		
NP 150	1,5	1,1		2,6		56	51	44	40	36	33	30	27	25						A00620		
NP 200	2,0	1,5		3,8		53	51	49	46	44	43	41	38	37	34	31	27	24		A00623		
NP 300	3,0	2,2		5		56	54	52	49,5	47,5	45,5	43,5	41,5	40	37	33,5	30	27		A00625		

Curbe de functionare la 2900 rpm

NP 100 / 130 / 150

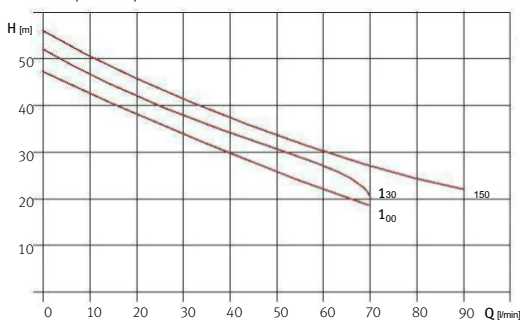

NP 200 / 300

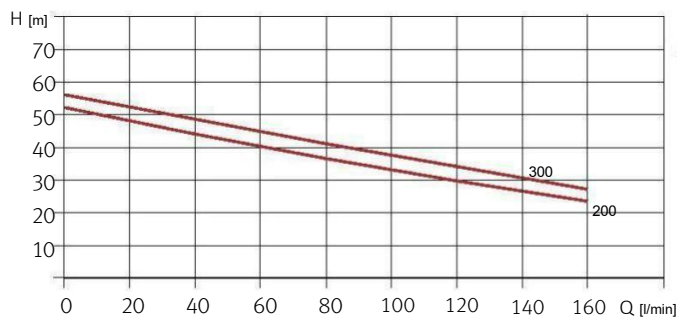

Dimensiuni si greutate

Model	A	B	C	D	E	F	G	DNA	DNM	Kg
NP 100	430	185	195	141	17,5	140	152,5	1"	1"	15,6
NP 130	430	185	195	141	17,5	140	152,5	1"	1"	16,6
NP 150	510	210	220	166	18	166	165	1 ^m /4	1"	24,6
NP 200	510	210	220	166	18	166	165	1 ^m /2	1"	26,5
NP 300	510	210	220	166	18	166	165	1 ^m /2	1 ^m /4	27,6

