

## Pompa centrifuga, monoetajata pentru recircularea apei.

### Aplicatii

Recircularea apei in piscine, jacuzzi si spa.

### Materiale

Corpul pompei, turbina, difuzorul, aspiratia si refulare din tehnopolimer.

Axul pompei din inox AISI 431.

Garnitura mecanica.

Carcasa motorului din aluminiu.

O-ringuri din NBR/EPDM.

### Dotari

Fara cablu.

Tiper: Racorduri incluse, aspiratie 50mm si refulare 32mm x2.

Tiper 2: Racorduri incluse, aspiratia 50mm si refularea 40mm x2.

### Motor

Asincron 2 poli.

Protectie IPX5.

Clasa de izolatie F.

Protectie termica incorporata.

Serviciu continuu.

### Limite de functionare

Temperatura maxima a apei 50 °C.



Tiper




Tiper 2

## Caracteristici tehnice

Model	I [A]	P1 [kW]	P2		c [μF]	I/min	50	100	150	200	250	300	350	400	Cod
	1~ 230V	1~	[kW]	[HP]		m <sup>3</sup> /h	3	6	9	12	15	18	21	24	1~230V
Tiper 70	3	0,7	0,37	0,5	12	mwc	8,8	7,9	6,7	5,4	3,9	2,3	-	-	208183
Tiper 90	3,8	0,9	0,75	1	12		9,3	8,5	7,6	6,4	5,1	3,6	2,2	-	208184
Tiper 2 75	5,3	1,2	0,55	0,75	16		14	12,5	11	10	7,5	6	4	-	137549
Tiper 2 125	5,6	1,5	0,9	1,2	16		15	14	12,5	11,5	10	8	6	4	137548


## Curbe de functionare la 2900 rpm

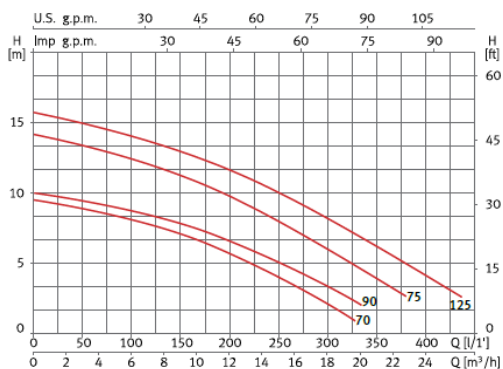

## Dimensiuni si greutate

Model	A	B	C	D	E	F	G	H	I	J	Kg
Tiper 70	102	166	155	312	47	88	160	-	2 <sup>1/4</sup> in	2 <sup>1/4</sup> in	6,2
Tiper 90	101	166	155	312	47	88	160	-	2 <sup>1/4</sup> in	2 <sup>1/4</sup> in	7,0
Tiper 2 75	124	187	215	378	50	120	120	130	2 <sup>1/4</sup> in	2 <sup>1/4</sup> in	9,4
Tiper 2 125	124	187	215	378	50	120	120	130	2 <sup>1/4</sup> in	2 <sup>1/4</sup> in	10,5

### Tiper

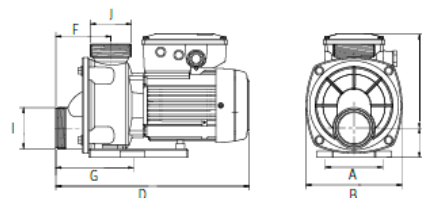

### Tiper 2

