

## Pompa centrifuga, monoetajata pentru recircularea apei.

### Aplicatii

Recircularea apei in piscine, jacuzzi si spa.

### Materiale

Corpul pompei, turbina, difuzorul, aspiratia si refularea din tehnopolimer.  
Axul pompei din inox AISI 431.  
Garnitura mecanica.  
Carcasa motorului din aluminiu.  
O-ringuri din NBR/EPDM.

### Dotari

Fara cablu.  
Racorduri incluse (50mm).

### Motor

Asincron 2 poli.  
Protectie IPX5  
Clasa de izolatie F.  
Protectie termica incorporata.  
Serviciu continuu.

### Limite de functionare


Temperatura maxima a apei 50 °C.



### Caracteristici tehnice

Model	I [A]	P1 [kW]	P2		c [μF]	l/min m³/h	25	50	100	150	200	250	300	350	Cod
	1~ 230V	1~	[kW]	[HP]			25	50	100	150	200	250	300	350	
Wiper 50	2,3	0,5	0,24	0,33	12	mwc	10	9,4	7,9	6	3,6	1	-	-	215079
Wiper 70	2,9	0,65	0,37	0,5	12		11	10,6	9,7	8,5	6,6	4,5	2,2	-	215080
Wiper 90	3,7	0,85	0,75	1	12		11,7	11,3	10,5	9,6	8,4	6,7	4,6	2,2	215081

### Curbe de functionare la 2900 rpm

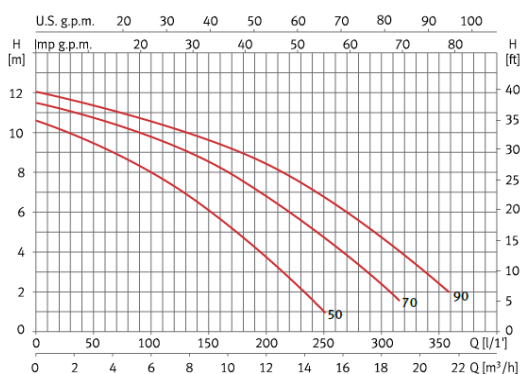

### Dimensiuni si greutate

Model	A	B	C	Kg
Wiper 50	219	337	155	5,7
Wiper 70	219	337	155	6
Wiper 90	219	337	155	6,9

