

Electropompa de suprafata autoamorsanta 9m.

Aplicatii

Pomparea apei curate.
Irigatii si presurizare.

Motor

Clasa de izolatie F.
Protectie IP44.
Serviciu continuu.
Protectie termica incorporata.

Materiale

Corpul pompei din fonta.
Turbinele din noryl.
Garnitura mecanica din grafit.
Axul motorului din inox AISI 304.



EJm100LB




EJWm/15M

Caracteristici tehnice

| Model | P2 | | I (A) | | l/min 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | 0 10 20 30 40 50 60 70 80 | |
|----------|-----|------|---------|---------|------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|----|
| | Hp | Kw | 1~230 V | 3~400 V | | | | | | | | | | |
| EJm100LB | 1,0 | 0,75 | 5 | - | mca | 44 | 40 | 32 | 28 | 23 | 18 | 15 | 10 | - |
| EJWm/15M | 1,5 | 1,1 | 7 | - | | 50 | 44 | 37 | 34 | 28 | 24 | 19 | 15,5 | 10 |

Curbe de functionare

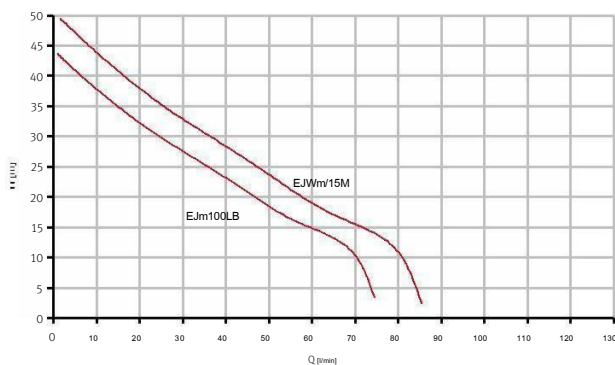

Dimensiuni si greutate

| Model | A | B | C | D | E | F | G | DNA | DNM | Kg |
|----------|-----|-----|-----|-----|-----|----|----|-----|-----|------|
| EJm100LB | 429 | 182 | 142 | 187 | 143 | 94 | 10 | 1" | 1" | 15,6 |
| EJWm/15M | 410 | 180 | 142 | 204 | 116 | 94 | 10 | 1" | 1" | 18,6 |

