

Submersibile 4"

Aplicatii

Pomparea apei curate pentru uz casnic, industrial si agricol.
Functionare in foraje de 4".

Materiale

Corpul pompei, aspiratia, refularea si axul pompei din inox AISI 304.
Difuzoarele si turbinele flotante din tehnopolimer.
O-ringuri din NBR/EPDM.

Dotari

Supapa de sens incorporata.
Cuplaj cu motor conform NEMA MG1-18.388.


Limite de functionare

Temperatura maxima a apei 40 °C.
Cantitatea maxima de nisip in suspensie 100g/m³.
Adancimea maxima de imersie 150m.



Caracteristici tehnice; Curbe de functionare la 2900 rpm; Dimensiuni si greutate

Model	P2		l/min m ³ /h	0	5	10	15	20	25	Cod
	[kW]	[HP]		0	0,3	0,6	0,9	1,2	1,5	
ES4 01 19	0,55	0,75		126	118	105	86	60	30	157698

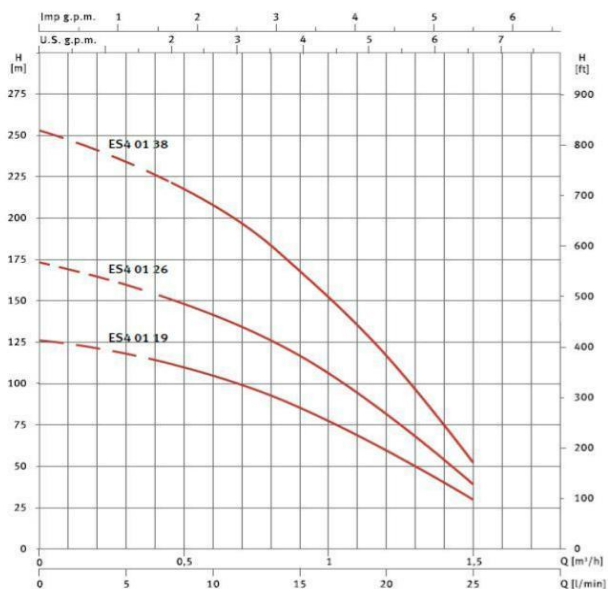

Model	A	B	C	Kg
ES4 01 19	481	98	1 1/4"	4,7

